



water solutions

CIVIL/INDUSTRIAL



SUBMERSIBLE ELECTRIC PUMPS
FOR DRAINAGE, CIVIL AND
INDUSTRIAL LIFTING SYSTEMS


series
Grey

zenit.com

EN

Why Grey?

The Zenit **Grey series** is a new solution for pumping clear wastewaters and black waters in civil, residential and industrial applications.

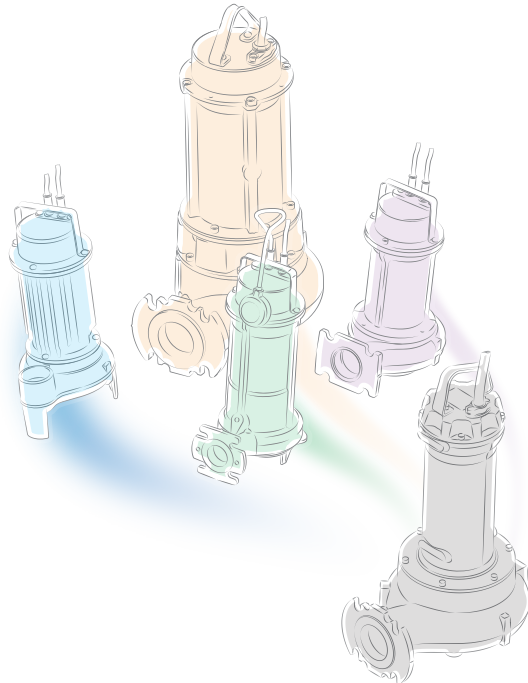

series Grey

The **Grey series** updates the offering with efficient, reliable products, while also **rationalising** the range.

The **Grey** project features completely **redesigned** hydraulics and motors, to guarantee high performance, low consumption and outstanding versatility.

This means clearer choices for end users selecting their products, and more efficient industrialisation.

And greater efficiency means even better reliability and lower costs, all benefiting customers.

It's easily, with the **Grey series**.

Grey series


Motors

from 1.5 to 18.5 kW operating at 50 and 60 Hz
double mechanical seal in oil chamber

Hydraulics

- vortex (**DGG**)
- channel (**DRG**)
- grinding (**GRG**)
- high head (**APG**)

Development of the Zenit range for global water treatment

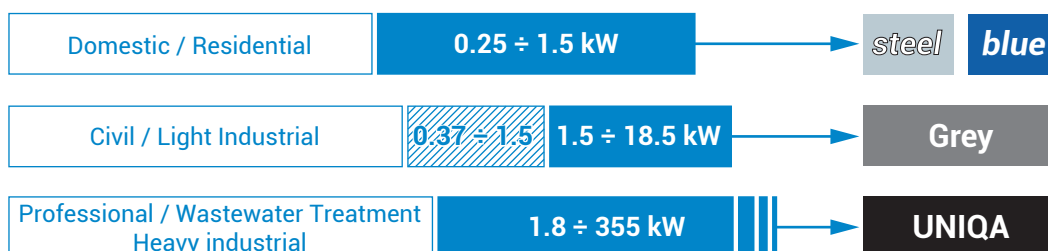

Under development

One range, a thousand applications

Thanks to its versatility, the **Grey series** can be used in a very wide variety of sectors, from civil/residential to industrial installations.

These units' strong points lie in the key principles that inspired and guided the design team throughout their development.



Innovation

The **Grey series** is highly innovative from many points of view.

It is new in its practical, functional design.

New in its colour, standing out from the competition and other Zenit models.

New in its operation, thanks to leading-edge engineering, efficient motors and completely redesigned hydraulics that deliver excellent performances.



Reliability

A submersible pump must guarantee trouble-free continuous service.

Exceptionally reliable, the **Grey series** needs far fewer repairs, cutting the relative costs.

Running costs will be lower and there will be fewer plant stoppages, meaning less inconvenience and more effective service scheduling.



Economy

Every installation and maintenance engineer needs to cut submersible pump purchasing, assembly and maintenance times and costs.

With the **Grey series** all this is possible thanks to a wide choice of models and the use of immediately available standard components, which deliver optimisation of any application, shorter installation times and slashed maintenance costs.




Simplicity

A good motto for the **Grey series** would be "the strength of simplicity".

The Zenit engineers realised that simple things are unlikely to fail and easy to repair.

Exactly what installers, plumbers, heating engineers and everyone else who uses these pumps needs: machines that are easy to install and use, built to facilitate maintenance and compatible with existing systems.


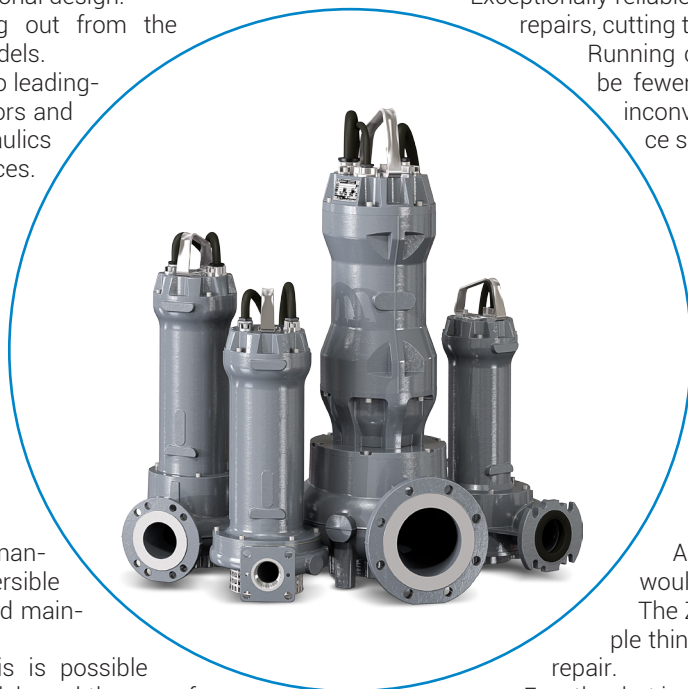


Characteristics

- Cast iron structure
- Three-phase motor from 0.37 to 18.5 kW
- Insulation: class H (180°C)
- Protection rating: IP68
- 50 Hz and 60 Hz versions
- Thermal protection devices incorporated in stator
- AISI 431 drive shaft
- Two silicon carbide mechanical seals in large oil chamber
- Discharge from DN32 to DN250
- Large free passage



Overview of operating ranges

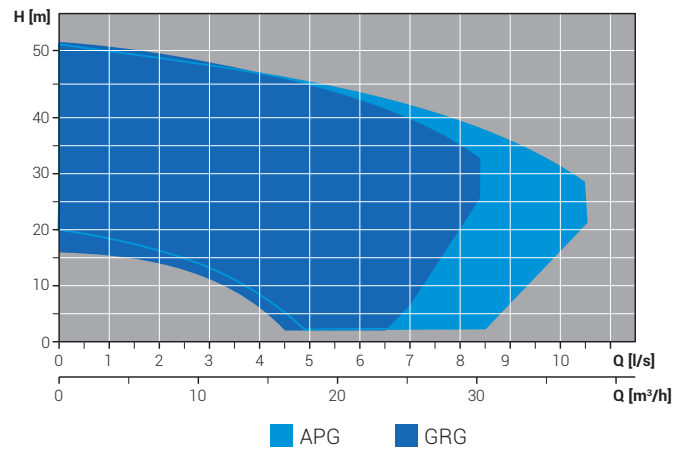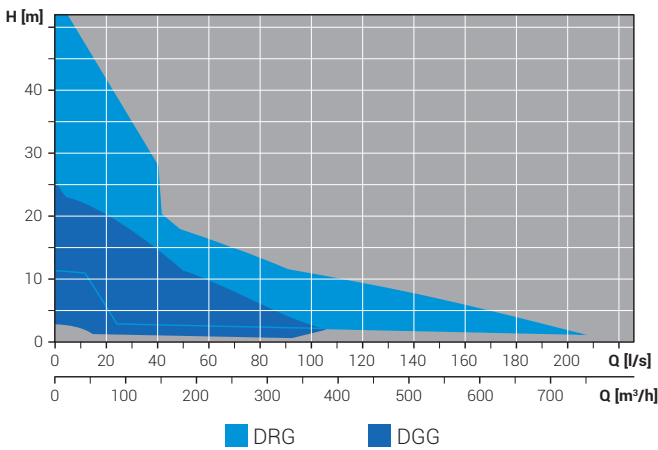


Construction materials

Motor casing	Cast iron GJL-250
Impeller	Cast iron GJL-250
Mechanical seals	Two in silicon carbide (2SiC)
Nuts and bolts	Stainless steel - class A2-70
Standard gaskets	NBR
Drive shaft	AISI 431 Stainless Steel
Chopper knife	Chromium steel (GRG)
Painting	Bicomponent epoxy paint with high resistance to corrosion

Operating specifications

Max operating temperature	40°C
pH of liquid	6 ÷ 14
Liquid viscosity	1 mm ² /s
Max submergence	20 m
Liquid density	1 kg/dm ³
Max acoustic pressure	<70 dB
Max. starts/hour	20 (<10 kW) 15 (>10 kW)


The data provided are not binding. Zenit reserves the right to modify any product without notice.



The technical **Data Booklet** complete with duty curves is available for download in the download area of zenit.com

To select the pump best suited to your needs we advise you to use the **Zeno Pump Selector** configuration tool on the zenit.com website

Your guide to Grey

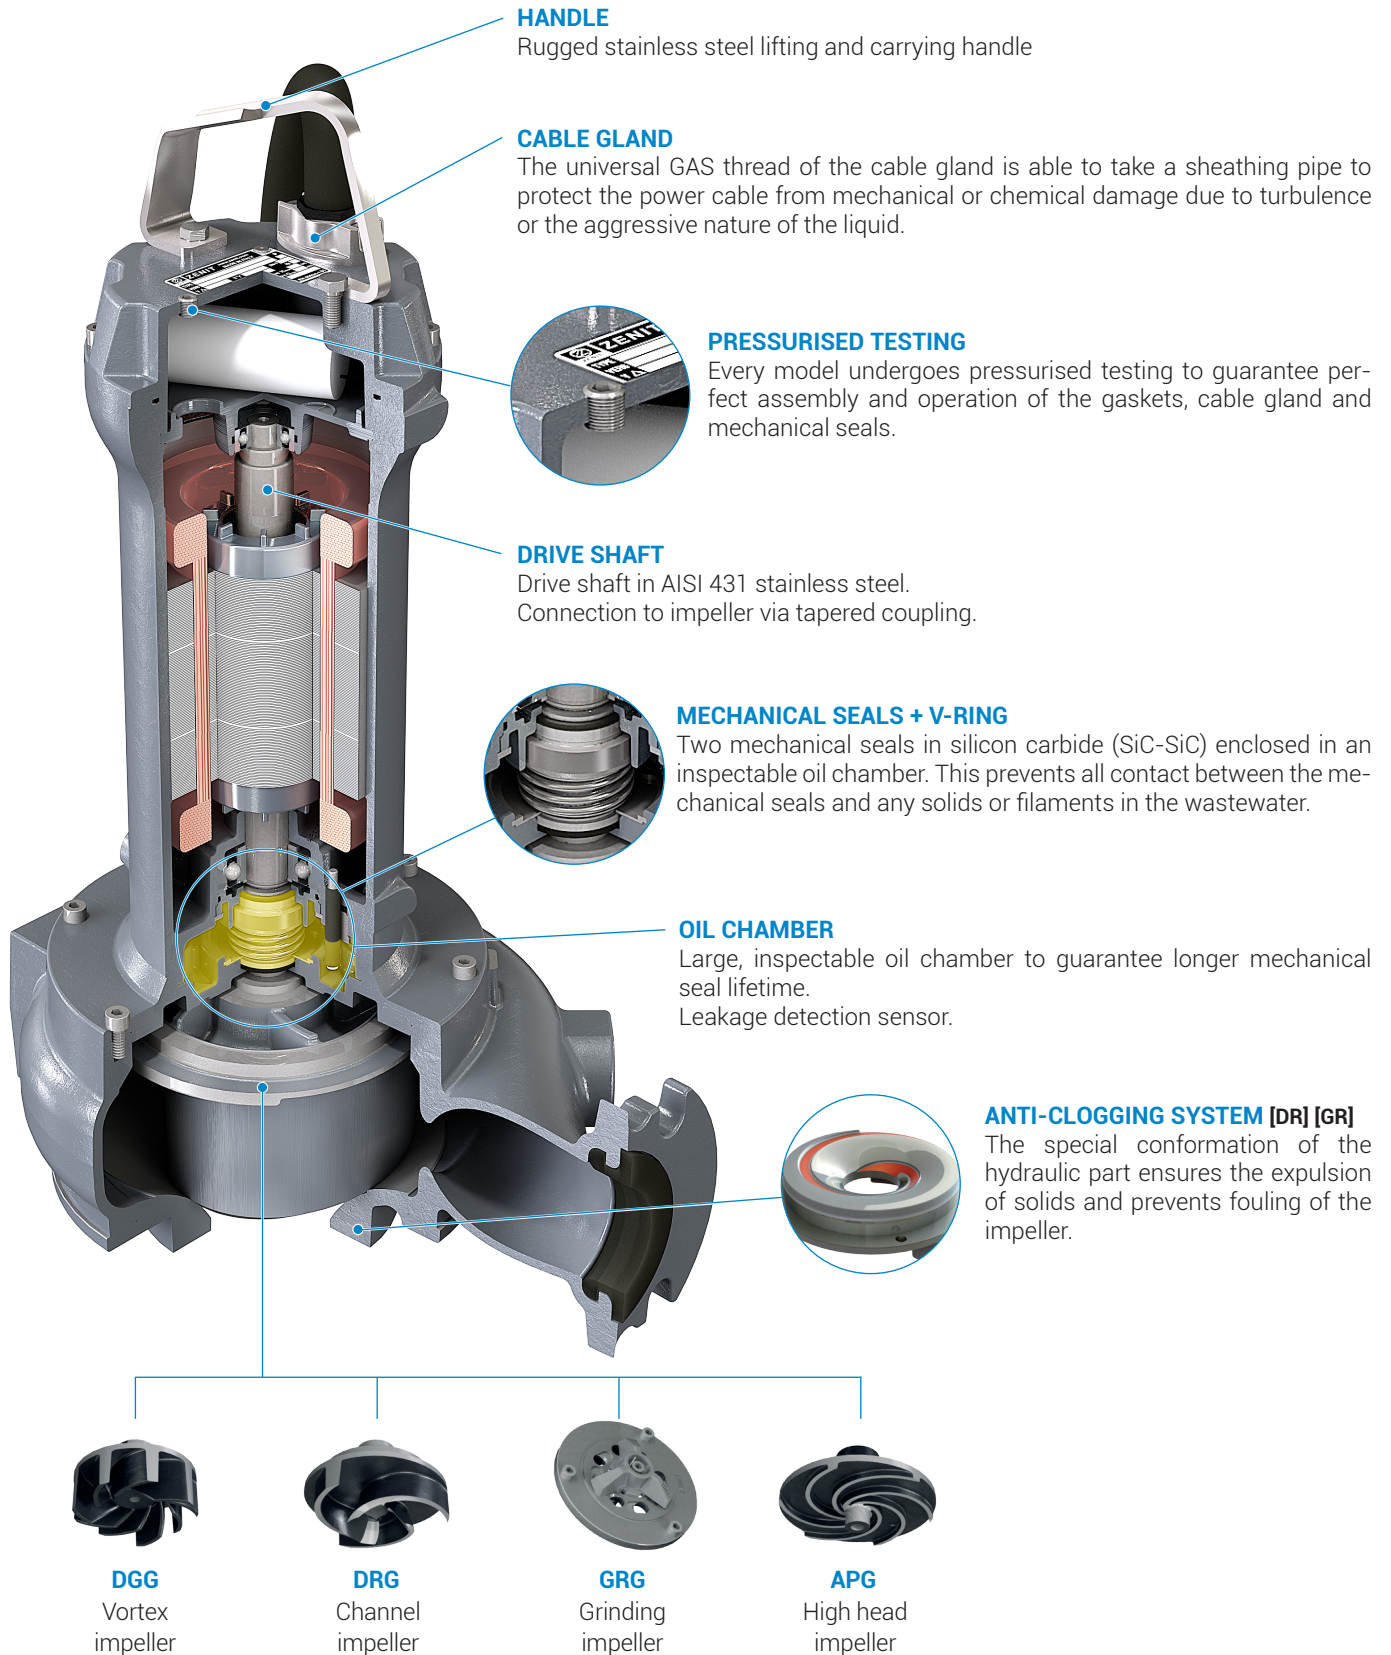

HANDLE
Rugged stainless steel lifting and carrying handle

CABLE GLAND
The universal GAS thread of the cable gland is able to take a sheathing pipe to protect the power cable from mechanical or chemical damage due to turbulence or the aggressive nature of the liquid.

PRESSURISED TESTING
Every model undergoes pressurised testing to guarantee perfect assembly and operation of the gaskets, cable gland and mechanical seals.

DRIVE SHAFT
Drive shaft in AISI 431 stainless steel.
Connection to impeller via tapered coupling.

MECHANICAL SEALS + V-RING
Two mechanical seals in silicon carbide (SiC-SiC) enclosed in an inspectable oil chamber. This prevents all contact between the mechanical seals and any solids or filaments in the wastewater.

OIL CHAMBER
Large, inspectable oil chamber to guarantee longer mechanical seal lifetime.
Leakage detection sensor.

ANTI-CLOGGING SYSTEM [DR] [GR]
The special conformation of the hydraulic part ensures the expulsion of solids and prevents fouling of the impeller.

DGG
Vortex impeller

DRG
Channel impeller

GRG
Grinding impeller

APG
High head impeller


DGG

Hydraulics

- Vortex impeller
- Full free passage


Suitable for

- Biological liquids and wastewater
- Civil and industrial lifting
- Wastewater treatment plants and livestock farms



Range characteristics

Type of impeller	Vortex
Power (P2)	0.37 ÷ 15 kW
Poles	2 / 4 / 6
Discharge	V GAS 1½" - 2½"
	H DN 65 ÷ 150
Free passage	max 125 mm
Max flow rate	106 l/s
Max head	24.5 m

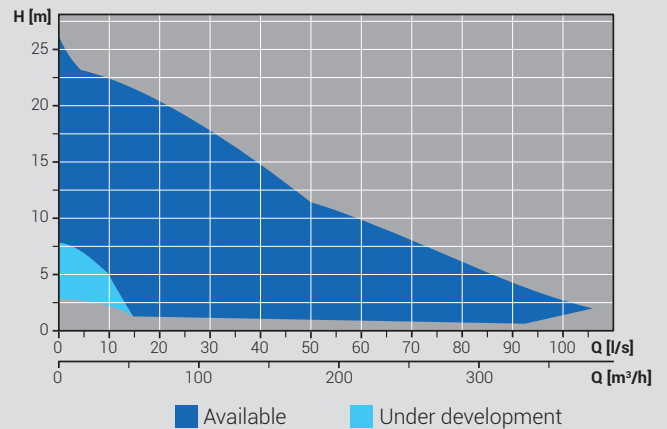


DRG

Hydraulics

- Channel impeller
- Large free passage


Suitable for

- Recirculation of industrial and process waters
- Civil lifting
- Drainage and lifting of water from first rainfall tanks



Range characteristics

Type of impeller	Channel
Power (P2)	0.37 ÷ 18.5 kW
Poles	2 / 4 / 6
Discharge	V GAS 1¼" - 2"
	H DN 65 ÷ 250
Free passage	max 110 mm
Max flow rate	205 l/s
Max head	50 m

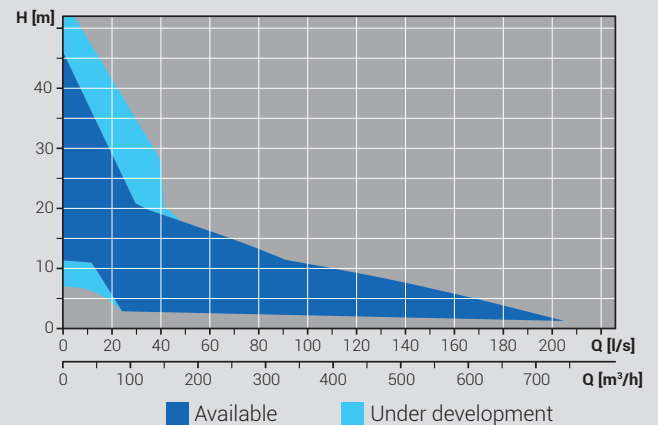


GRG

Hydraulics

- Multi-channel open impeller
- Grinding system with rotary knife


Suitable for

- Lifting of liquids containing fibres and filaments
- Professional and industrial applications
- Livestock farms



Range characteristics

Type of impeller	Grinding impeller	
Power (P2)	0.75 ÷ 9 kW	
Poles	2 / 4	
Discharge	V	-
	H	GAS 1½" - 2" DN 40 ÷ 100
Free passage	-	
Max flow rate	8.4 l/s	
Max head	53.5 m	

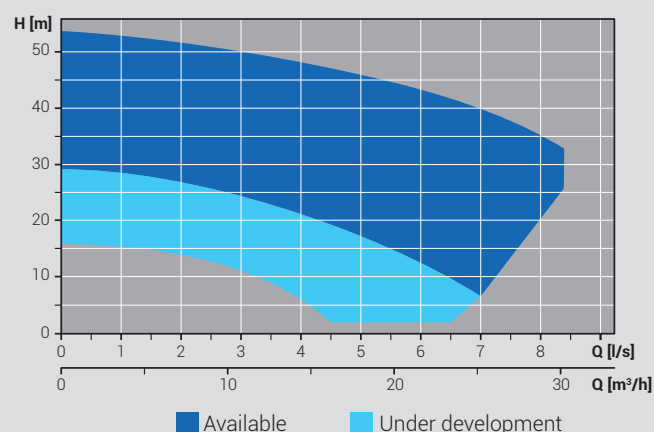


APG

Hydraulics

- Multi-channel open impeller
- High manometric head


Suitable for

- Industrial applications and car-washes
- Clean water in fountains and water features
- Irrigation and fish farming




Range characteristics

Type of impeller	High head	
Power (P2)	0.75 ÷ 9 kW	
Poles	2	
Discharge	V	-
	H	GAS 1½" - 2" DN 40 - DN 50
Free passage	max 10 mm	
Max flow rate	10.5 l/s	
Max head	52 m	

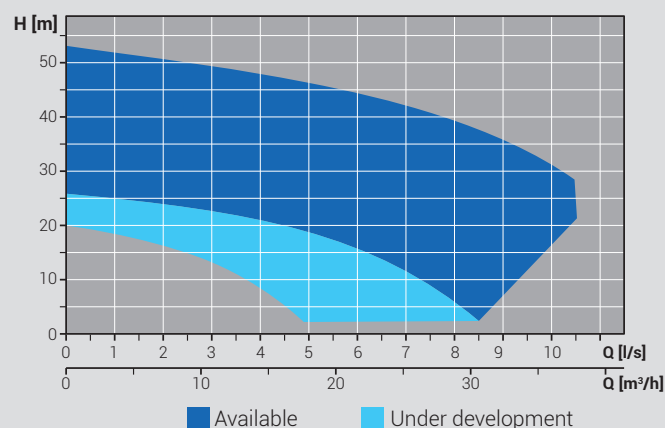


Installations and accessories


A full range of **accessories** supplied as standard simplifies any **installation**



FREE installation



PERMANENT installation

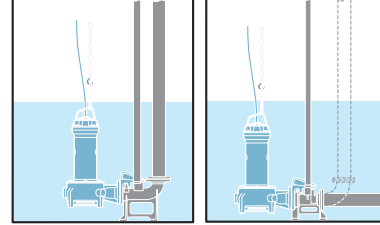

Installation with BOTTOM COUPLER



Bottom couplers

- Cast iron body - steel metal fasteners
- Vertical and horizontal discharge
- DN 65 ÷ DN 250



Ball check valves

- Cast iron body - steel metal fasteners
- Rubber ball
- DN 65 ÷ DN 250



Gate valves

- Cast iron body with bronze seats
- Full free passage



Discharge bends

- In cast iron or galvanised steel
- Full free passage
- DN 65 ÷ DN 250



Base plates

- In cast iron or galvanized steel
- Ideal for free installation



Chains

- In stainless and galvanised steel
- Ø 5mm, 8mm, 12mm


Maintenance and Service

Grey models allow **easy maintenance** thanks to their simple, rational construction



The **Grey series** has been designed and built to facilitate the routine replacement of parts subject to wear and tear, to extend the life-cycle and cut operating costs.

Installation Engineers and Authorised Service Centres are provided with full documentation and detailed installation diagrams, to offer unbeatable maintenance service and ensure high product quality standards.



Full territorial coverage and an efficient organisation assure the **customer** support in all phases of the process, from design to shipping arrangements.



BEFORE-SALES

- Product selection
- Customisation
- Cost and consumption estimate



CONSULTING

- Evaluation of solutions
- Design of system
- Presence on site



AFTER-SALES


- Support during installation
- Assistance during testing
- Authorised service centres

ZENO Navigator Suite: one-click access to the right solution for you

The Zenit online and mobile **service platform** for managing the before- and after-sales process.


Designed to meet the needs of sector professionals, whether you are an engineering firm, a plant operator or an installer, the ZENO portal is the most effective tool for managing your business.

The **ZENO Pump Selector** application provides useful assistance during the electric pump selection and configuration process, and the product that meets the search parameters can be swiftly identified through selection by duty point or by choosing the type of hydraulics directly.

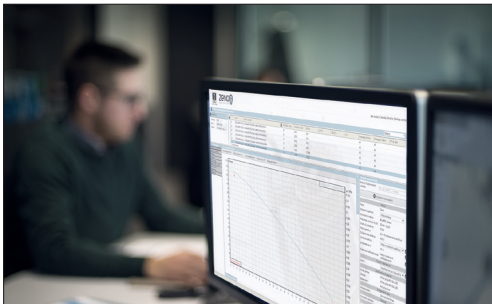


PUMP SELECTOR

Designed to meet the needs of sector professionals, whether you are an engineering firm, a plant operator or an installer, the ZENO portal is the most effective tool for managing your business.

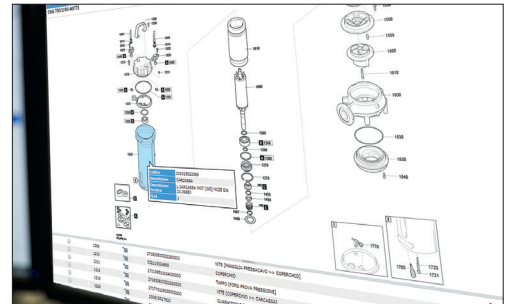

SPARE PARTS

A quick, user-friendly tool enabling you to easily select the spare part you require, add it to your cart and send off your order automatically, with just a few clicks.

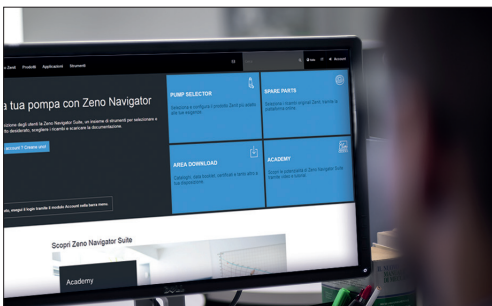

DOWNLOAD

You have access to a library of Zenit and industry technical and commercial documentation.



ACADEMY

The Academy selection offers you all information required for knowledge of and training in Zenit products and services.

Mobile, ZenoApp on smartphone and tablet, available for iPhone and Android



Web: zenit.com

Zenit Group

Today the Zenit Group ranks among the top national and international names in the design and manufacture of submersible electric pumps for domestic, civil and industrial use, and water treatment systems.

With the know-how and experience acquired over the years, Zenit offers the market a comprehensive range of products designed to meet the most demanding needs.



Modena
Italy



Bascharage
Luxembourg



Suzhou
China



Singapore
Singapore

WE STRIVE TO BE A VALUABLE PARTNER
YOU CAN TRUST IN YOUR SEARCH FOR
WATER TREATMENT **SOLUTIONS** AND
SERVICES

Our organisation

Today, **Zenit** is a modern industrial organisation with a workforce of over 250 and 4 locations worldwide, that manages its markets directly and with success, thanks to full territorial coverage.


This international expansion is driven by our desire to serve our customers better with closer proximity.

Each **Zenit** group company has its own organisation, but they all operate in pursuit of a single mutual objective. Our origin as a family business has enabled us to stay streamlined and flexible, quick to respond with effective solutions.





Come and visit us at
www.zenit.com



water solutions

The data provided are not binding.
Zenit reserves the right to modify the product without advance notification.

For further information, visit www.zenit.com

Code: 29040020920400000
Version: 01

The digital version of this catalogue is available for download at: www.zenit.com